
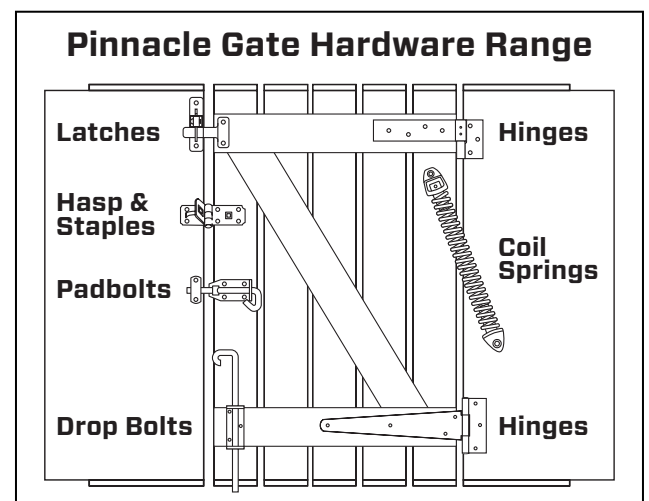


# 60mm | Adjustable Toggle Latch

**Tools required:** Pencil, No.2 Phillips screwdriver, drill and 2mm drill bit.

## Installation instructions:

1. Place toggle latch in desired location ensuring it functions as intended.
2. Mark screw locations for toggle latch and drill pilot holes using a 2mm drill bit.
3. Fasten the toggle latch with screws provided.
4. Position the keeper where it engages correctly with the latch. Mark and drill 2mm pilot holes and fasten with screws.

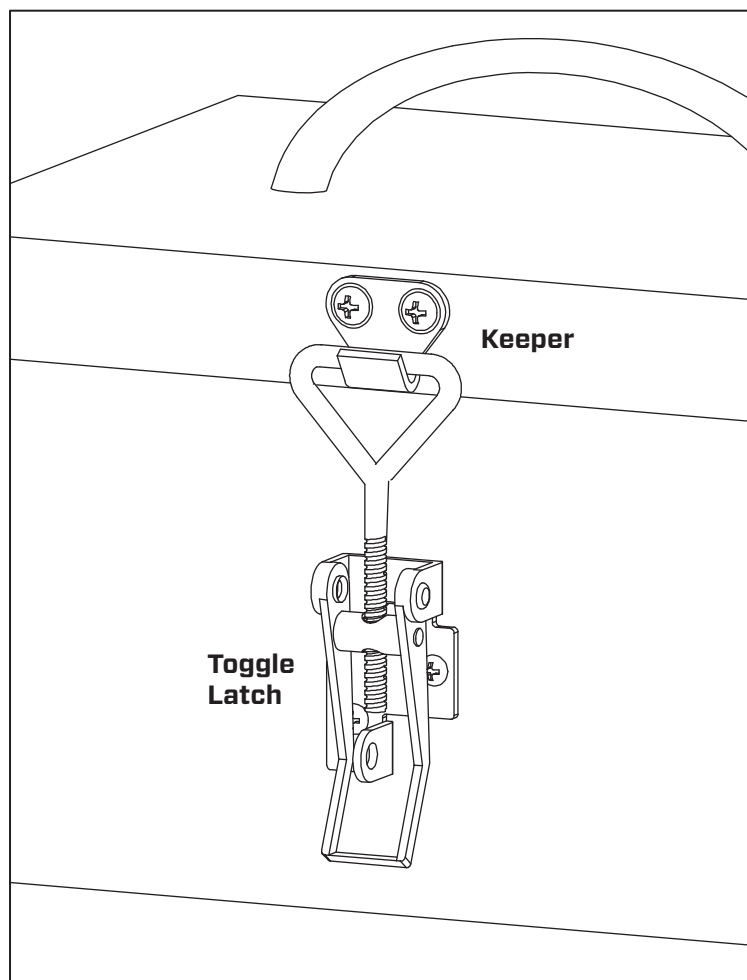

## Corrosion Protection Chart

Finish:	Rating:
Stainless Steel	Ultimate
Galvanised	High
Zinc Plated	Moderate

Suitable for model no: GHS049.

CONNECT WITH US!  
[PINNACLE.NET.AU](http://PINNACLE.NET.AU)

