

## Multibolt 4 Pack


### Very Important!

Please fasten all screws by hand and not an electric screwdriver or drill, as over tightening is not recommended.

Note: Will fit Aluminium and Timber windows of following style: Awning, Casement, Sliding and Double Hung.

For Timber and Aluminium Awning, Casement and Sliding windows, use the Short Bolt (A). For Aluminium Double Hung windows use the long Thin Bolt (B). For Timber Double Hung windows use the long Thick Bolt (C).

### Mounting locations for various window types:

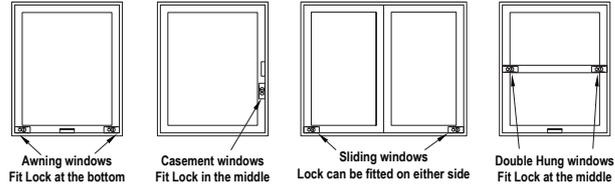

**SAME INSTALLATION PROCEDURE APPLIES TO ALL WINDOW TYPES. THE ONLY DIFFERENCE IS LOCATION OF LOCK.**


### Instructions to install the Multibolt window lock.

If installing this Multibolt window lock into a new window, you will need the following tools:




If you are replacing an existing lock, remove your existing lock, clean down surfaces and follow the installation process.

### Contents

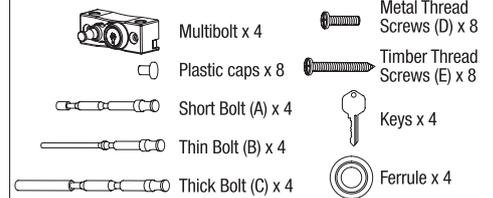


### Step 1: Preparation

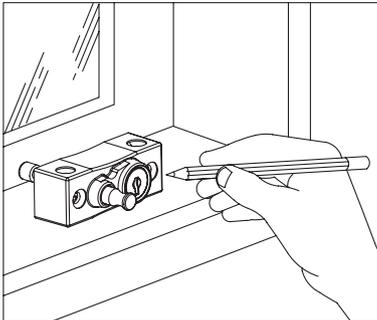

Determine the type of window you will be installing to. Make sure you choose the best fixing location for your window type. Accuracy is vital so mark and measure carefully, and drill holes level.

### Step 2: Installing Multibolt to window.

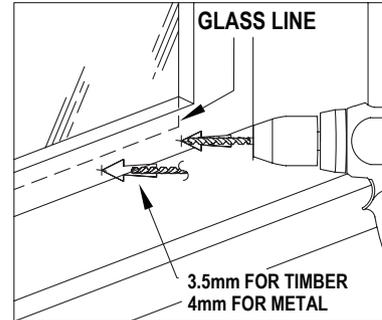


Hold Multibolt window lock in the desired position and mark the centre of the 2 x installation holes. Using a hole punch or a nail, punch the centre of the holes before drilling to make sure drill bit doesn't move. Drill 2 x 4mm holes for metal windows, 2 x 3.5mm holes windows or 2 x 3.5mm holes for timber windows at marked positions.

### Step 3: Multibolt.


#### Option 1: For Awning, Casement, Sliding Windows.

If the bolt of the Multibolt window lock fully engages the window frame, make sure the window is properly closed and tap the end of the bolt against the frame to mark the drilling position. Using a hole punch or a nail, punch the centre of the hole before drilling to make sure drill bit doesn't move. Drill a 9mm hole for the Thick Bolt or a 5mm for the Thin Bolt. Make sure it is deep enough for the bolt to fully engage. If you are wanting to have a fixed venting position move the window to the desired position and drill another hole using the same process. Check to make sure the lock works in the closed and vented position.

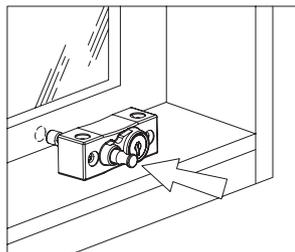

#### Option 2: For Double Hung Windows

If the bolt of the Multibolt window lock fully engages the window frame, make sure the window is properly closed and tap the end of the bolt against the frame to mark the drilling position. Using a hole punch or a nail, punch the centre of the hole before drilling to make sure drill bit doesn't move. Drill the hole for the bolt through both sashes. Do not break through outside sash. Drill a 9mm hole for the Thick Bolt or a 5mm for the Thin Bolt. Make sure it is deep enough for the bolt to fully engage. Check to make sure the lock works in the closed position.

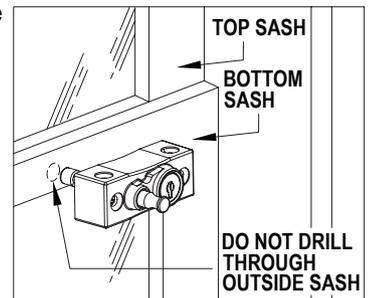

### WARRANTY CONDITIONS

Any claim under this warranty must be made within 3 year of the date of purchase of the product. To make a claim under this warranty, take the product (with proof of purchase) to any Bunnings store (see [www.bunnings.com.au](http://www.bunnings.com.au) for store locations). Pinnacle Hardware bears reasonable, direct, expenses of claiming under the warranty. You may submit details and proof of purchase to our support center for consideration. The warranty covers manufacturer defects in materials, workmanship and finish under normal use. This warranty is provided in addition to other rights and remedies you may have under law. Our goods come with guarantees that cannot be excluded under the Australian consumer law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. This warranty excludes damage resulting from product misuse or product neglect. The warranty covers domestic use only and does not apply to commercial applications. This warranty is given by Pinnacle Hardware, ABN 87 614 496 196, 28 Hudson Court, Keysborough Vic 3173, 1800 349 776, Email: [support@pinnacle.net.au](mailto:support@pinnacle.net.au). 'Pinnacle' is a trademark TM © Pinnacle Hardware. Suitable for models WHS005 and WHS006.